

# Fitting Guide

## Rear drinksholder

Written by .

### Tools required were:

- Large flat blade screwdriver
- T-35 and T-40 Security bits

### Part Numbers:

- V8Z0 863 476 4P K - Shelf (Drinks Holder) (Black)
- V8Z0 864 080 - Bracket
- V8Z0 864 079 A – Bracket
- V8Z0 864 455 – Adapter (2 off)
- VN 102 883 03 – Screw (2 off)

### Instructions:

1. Check all parts. (Photo below) **Note: End bracket with 2 prongs not used.**



# Fitting Guide


## Rear drinksholder

Written by .

2. Remove both rear seats (Photo below).



3. Remove plastic trim (push fit) with flat screwdriver (secured in 4 locations) (Photo below).

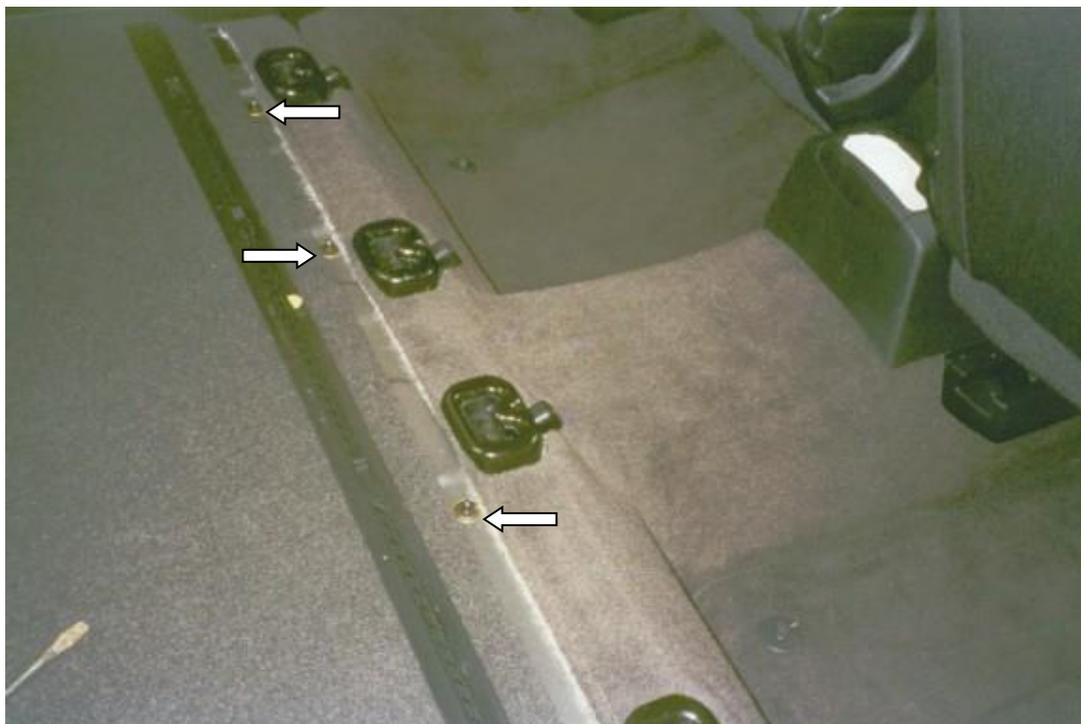

## Rear drinksholder

Written by .

4. Unhook carpet from all seat fixings and remove inner bolts from the middle 2 seat fixings (Security bit T-35 straight bit) (Photo below).



5. Poke the new bolts through metal brackets and then the carpet making sure they are aligned with the open holes (Security bit T-40 straight bit) (Photo below).



# Fitting Guide

## Rear drinksholder

Written by .

6. Tighten bolts and reposition carpet around the seat fixings.
7. Replace the plastic trim.
8. Push the new plastic cover into the new metal brackets must click (Photo below).



9. Push the front bracket under the rear of the centre console again must click (I had 2 supplied only one would fit the drinks holder the one without the 2 prongs) (photo below).



# Fitting Guide

## Rear drinksholder

Written by .



10. Place the drinks holder in the rear brackets and press the front down again until it clicks (Photo below).



11. Remove drinks holder by pressing the button and then lifting the front end (Photo above).
12. Replace the rear seats then replace the drinks holder.